


S305QAL


Dust Emissions Monitor for CEMS

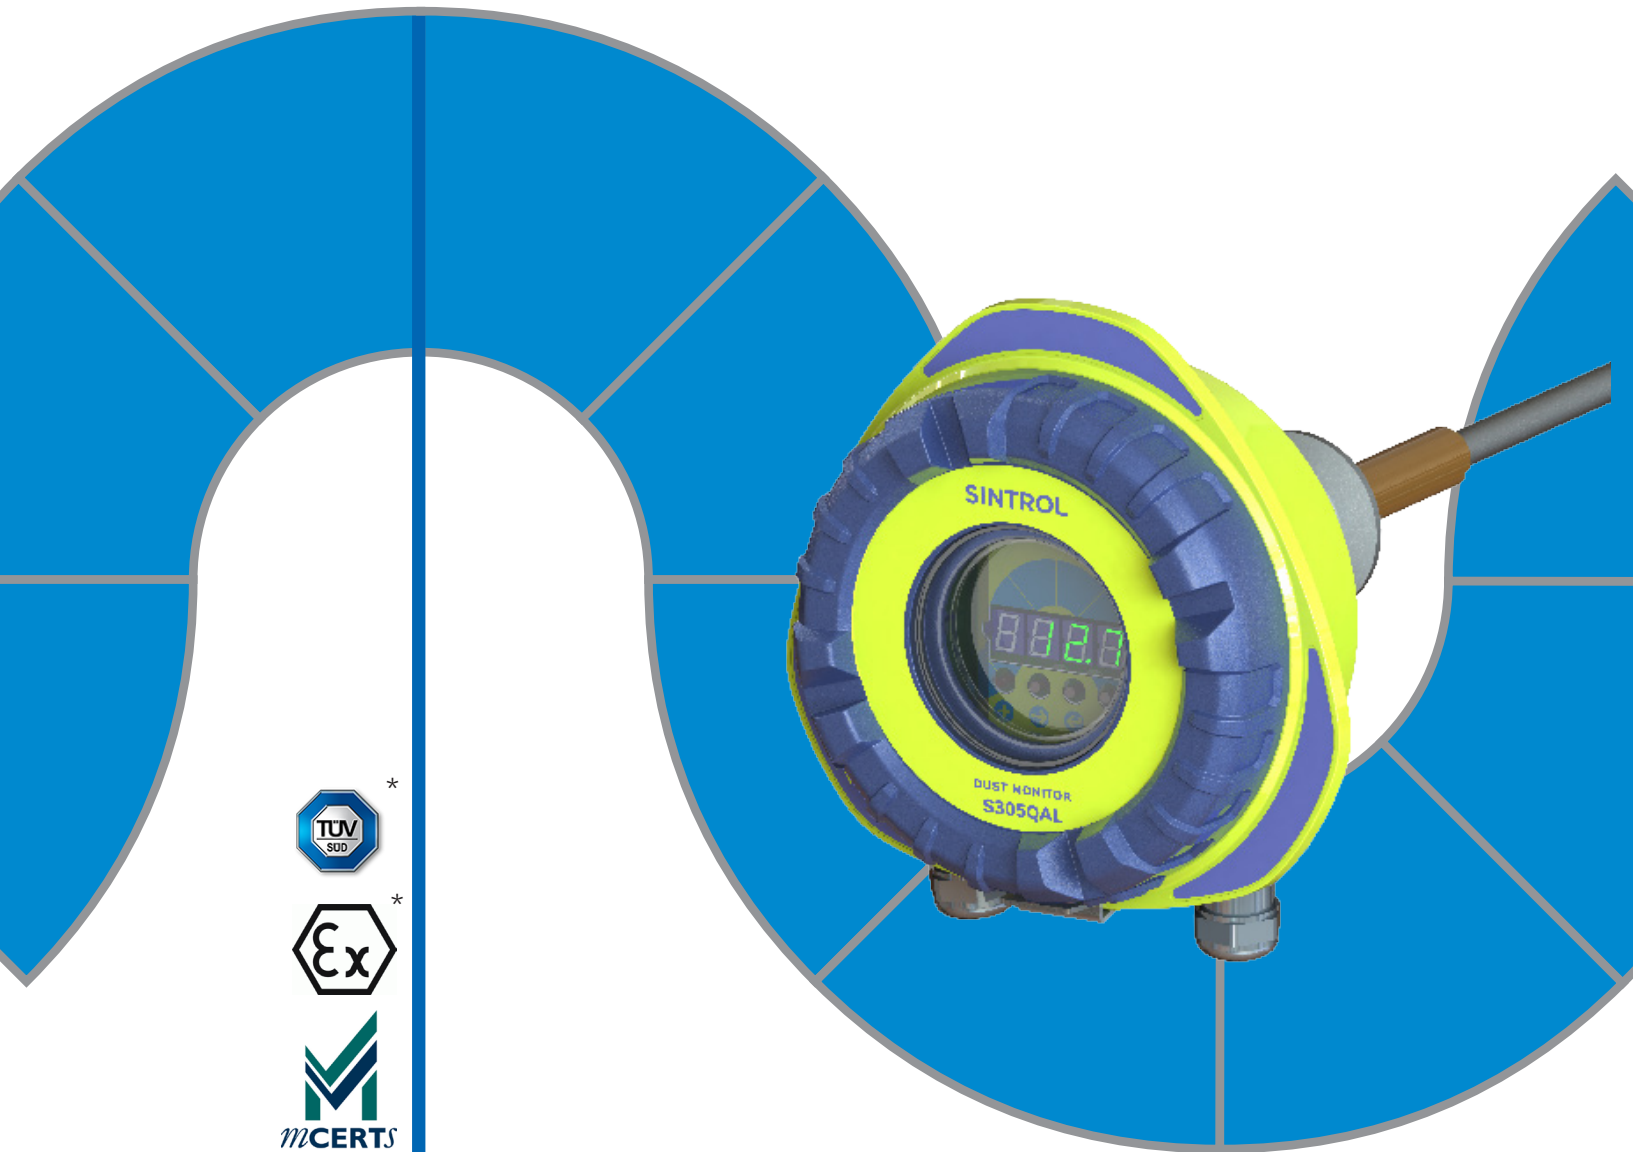

* Pending

S305QAL

- Simple one sided installation, just one small process coupling
- No alignments required, therefore no measurement accuracy issues due to poor alignment.
- Easily adaptable air-purge option
- Easy to commission
- Local display with status indication
- Not affected by vibrations
- Light and compact, but yet reliable and durable
- Low maintenance costs, no time consuming cleaning operations
- Flow velocity compensation 3 – 40 m/s
- Certified for official regulation monitoring
- No need for consumable spare parts
- Lowest certified range 0 - 7.5 mg/m³

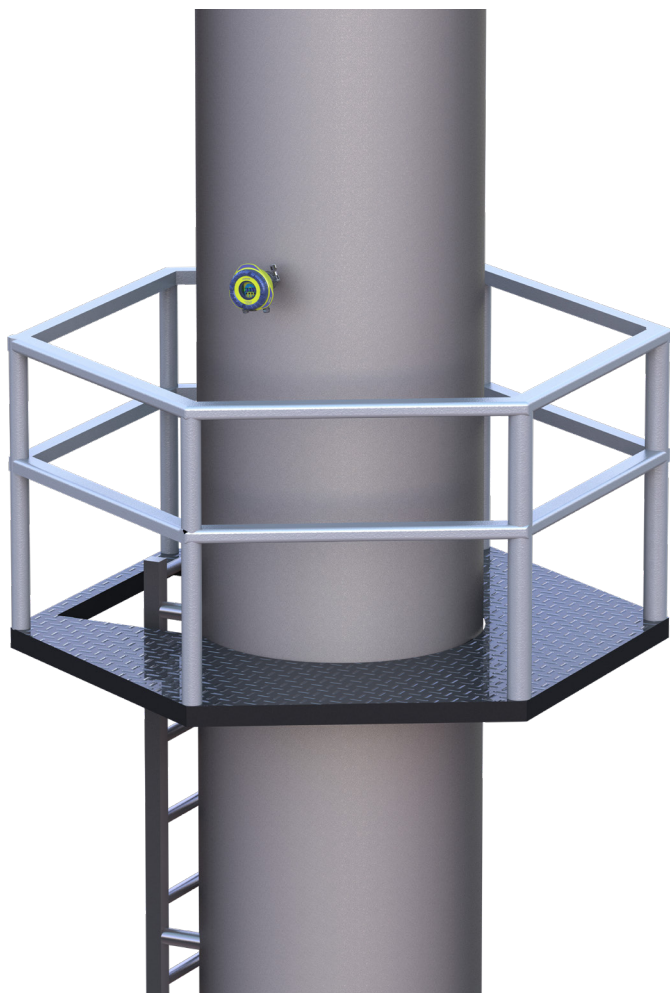

S305QAL is approved for plants operating under the below regulations:

Approved for plants operating under the below regulations:

- EC Directive 2000/76 Waste incineration
- LCPD – Directive 2001/80/EC for large combustion plants
- EC Directive 2010/75 Industrial Emissions
- EC Directive 2015/2193 (Medium Combustion Plants) Germany: 27th BImSchV, the 30th BImSchV or the 44th BImSchV
- S305QAL is compliant with EN 15267-1,2,3 and EN 14181, EN 13284-2:

Waste incineration

Power generation

Filtration plants

Cement

Pharmaceutical

Steel

Chemical

Wood

Inductive Electrification

S305QAL is designed for measuring Total Suspended Particles (TSP) in the airflow inside pipes and ducts and stacks.

When moving particles pass nearby or hit the probe, a signal is induced. Inductive Electrification Technology is based on the Triboelectric AC signal and it minimizes the influence of sensor contamination, temperature drift and velocity changes at a detection limit as low as 0.01 mg/m³.



Conformity of S305QAL to EN 15267-3:2007

- Certification ranges: 0 ... 7.5 mg/m³, 0 ... 15 mg/m³, 0 ... 100 mg/m³
- Flow rates in the range from 3 - 40 m/s
- Can be networked via RS485 (Modbus RTU) interface compliant to VDI 4201



Installation, commissioning, and calibration of S305QAL against gravimetric sampling

- One sided installation and no mechanical alignments or adjustment
- IP 66 protected, therefore no weather protection needed (-20 to 50 °C).
- Auto Setup function gives instant usable range settings
- Power supply can be 100 - 230 VAC or 24 VDC
- Local- and remote setup possibilities via RS485



The periodic control of the S305QAL during its ongoing operation

- Automatic Zero and Span check, requires no manual actions.

Maintenance

- Only cleaning of the probe to be performed
- No further adjustments necessary




Annual Surveillance Test (AST)

- Annual checking the variability and the validity of the calibration function


Sintrol's Unique Auto Setup Function


The **Auto Setup** function is a unique Sintrol Dust Monitor feature which allows for a simple, user friendly setup. During the Auto Setup procedure, which is done in normal process conditions, the dust monitor will automatically adapt to the process conditions and set the measuring range and alarms accordingly. At normal conditions the instrument will show green light and the mA output is set to 5 % of range.

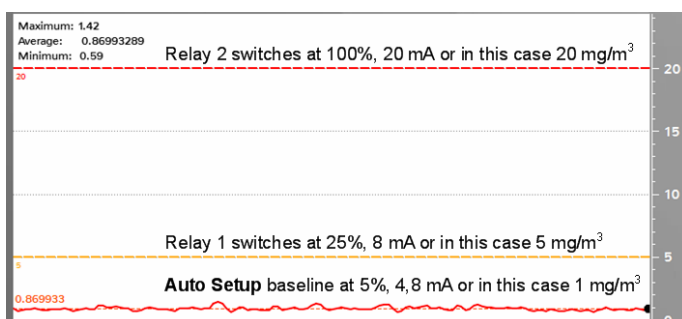

Local Display and User Interface

The S305 equipped with a local user interface for set-up and adjusting the instrument. The operator can see the actual measurement values on the 4- digit display in mA, % or mg/m³. With the 4-button interface the operator can navigate and change the most important operating parameters. Next to the display, is a button to start the Auto Setup procedure.

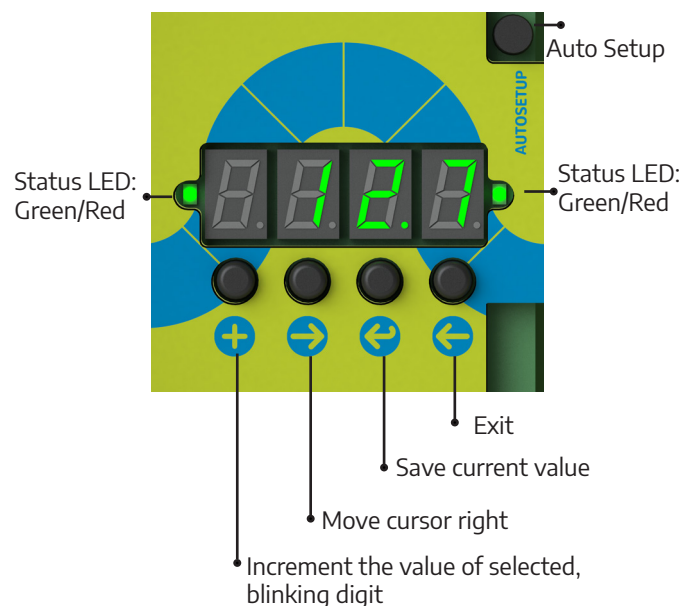

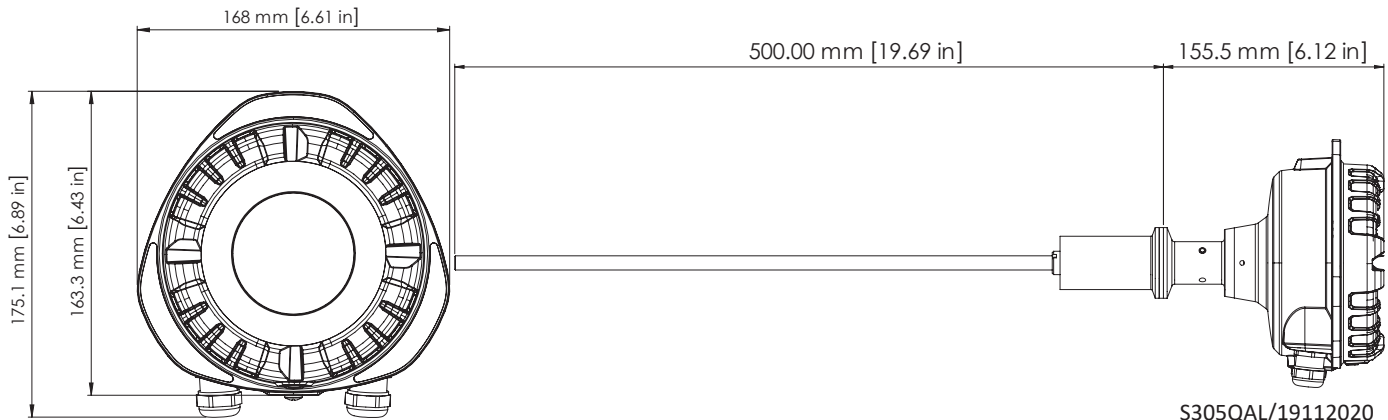

S305QAL/19112020

Product Name		S305QAL
Measured objects	Total Suspended Particles (TSP)	
Measurement principle	Inductive Electrification	
Measurement range	Detection limit 0.01 mg/m ³ Certification ranges: 0 ... 7.5 mg/m ³ , 0 ... 15 mg/m ³ , 0 ... 100 mg/m ³	
Ingress protection	IP66	
Power supply requirements	24 V DC ±10 % 100 ... 240 V AC ±10 %, 50 / 60 Hz	
Power consumption	Up to 10 W DC / AC	
Output signals	<ul style="list-style-type: none"> • 2 × Independent SPDT dry contact relays, max. 30 V DC / 5 A or 240 V AC / 5 A, cos φ = 1 • Isolated active 4 ... 20 mA output loop, max. loop resistance 250 Ω 	
Communication interface	<ul style="list-style-type: none"> • 2 × Serial communication RS-485 • USB • DustTool Software 	
Communication protocol	<ul style="list-style-type: none"> • Modbus RTU (with RS-485) Compliant with VDI 4201 • Sintrol network (with USB, RF and RS-485) 	
Physical characteristics		
Enclosure	Aluminium	
Wetted parts	<ul style="list-style-type: none"> • Probe: Stainless steel (316L) Coated probes optional • Insulation: Polyphenylene sulfide (Ryton R-4) 	
Weight	1.5 kg (3.3 lb)	
Ambient conditions		
Temperature	-20 ... 50 °C (-4 ... 122 °F)	
Humidity	Max. 95 % relative humidity (non-condensing)	
Process conditions		
Temperature	<ul style="list-style-type: none"> • Max. 300 °C (572 °F), optionally up to 700 °C (1292 °F) • Max. 250 °C (482 °F) with Teflon-coated probe 	
Pressure	<ul style="list-style-type: none"> • Max. 600 kPa (87 psi) in temperatures up to 300 °C (572 °F) • Max. 300 kPa (43 psi) in temperatures from 300 °C (572 °F) to 700 °C (1292 °F) when high-temperature process connection is used 	
Flow velocity	Min. 3 m/s (10 ft/s), max. tested 40 m/s (131 ft/s)	

SINTROL OFFICES

FINLAND WORLDWIDE

Head Office
Ruosilantie 15
00390
Helsinki
Finland
Tel. +358 9 5617 360
Fax. +358 9 5617 3680
nfo@sintrol.com

RUSSIA

Subsidiary
Dunaysky Str 13,
b.1 96158,
St.Petersburg
Russia
Tel. + 812 4486083
spb@sintrol.com

UKRAINE

Subsidiary
Rybalskaya
steet 2 Ukraine,
01011, Kiev city
Ukraine
Tel. +380 44 280
3392
ua@sintrol.com

INDIA

Representative
Office
A-2/78,
Safdarjung
Enclave 110029
New Delhi, India
Tel. +91 9811676061
india@sintrol.com

CHINA

Representative
Office
Room 517
Mingliuweilai
Building, No.18
Jiaomen, Majiapu
Xi Road, Fengtai
District, Beijing
Tel. +86 1 87888681
Fax. +86 1 87889570
china@sintrol.com

JAPAN

Representative
Office
Tokoyo
japan@sintrol.com



CERTIFIED BY

INSPECTA

ISO 9001